


Technical data model VSplus


Model	EAN-No. 4025092*	Capacity in kg/ number of chain falls	Chain dimensions d x p mm	Hand chain overhaul for 1 m lift m	Pull on hand chain at WLL daN	Weight at standard lift (3 m) kg
VSplus 0,5/1	*078832	500/1	6 x 18	28	26	9.0
VSplus 1,0/1	*078726	1000/1	6 x 18	42	36	11.2
VSplus 2,0/1	*079358	2000/1	8 x 24	54	54	18.0
VSplus 2,0/2	*079136	2000/2	6 x 18	84	37	15.3
VSplus 3,0/1	*079372	3000/1	10 x 30	83	52	28.0
VSplus 3,0/2	*079129	3000/2	8 x 24	108	41	24.7
VSplus 5,0/2	*079341	5000/2	10 x 30	165	44	38.7

Dimensions model VSplus

Model	VSplus 0,5/1	VSplus 1,0/1	VSplus 2,0/1	VSplus 2,0/2	VSplus 3,0/1	VSplus 3,0/2	VSplus 5,0/2
A min., mm	320	370	450	530	530	620	620
A1, mm	455	484	576	491	644	596	644
B, mm	17	15	33	31	38	41	48
C, mm	29	30	33	34	38	37	43
D, mm	11	15	23	24	27	24	33
F, mm	125	147	183	147	215	183	215
F1, mm	213	232	314	232	333	314	333
J, mm	115	125	142	125	163	142	163
J1, mm	146	153	174	153	179	174	179
K, mm	51	57	68	57	79	68	79
L, mm	64	68	74	68	84	74	84
M, mm	195	224	266	231	316	286	334
N, mm	260	260	310	260	310	310	310
O, mm	140	140	200	140	200	200	200
P, mm	110	110	130	110	130	130	130

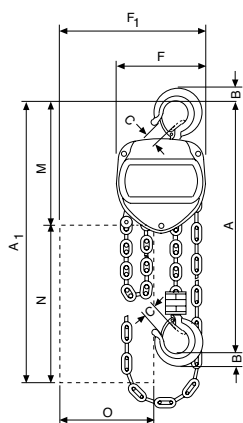

Model VSplus, 500 - 3000 kg, single fall

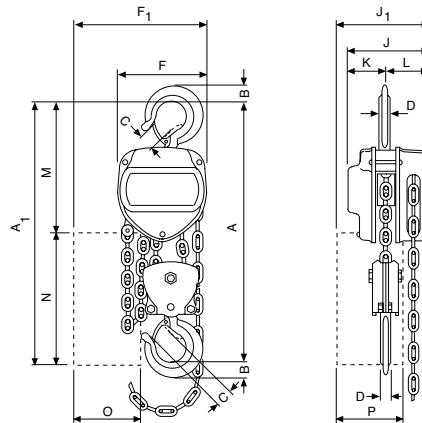

Model VSplus, 2000 - 5000 kg, double fall



Option: Chain container