
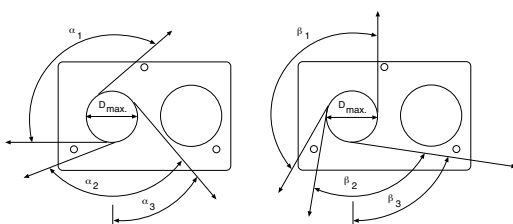
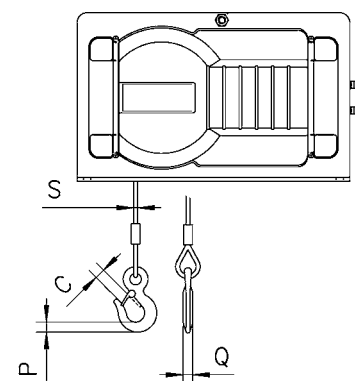
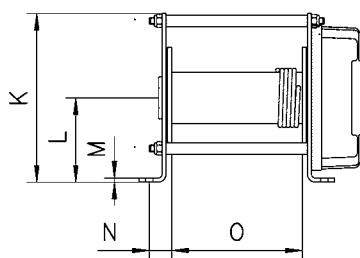


Dimensions model RPE (400 V direct control, standard drum)

Model	RPE 2-13	RPE 5-6	RPE 5-12	RPE 9-6	RPE 10-6
A, mm	405	405	405	525	525
B, mm	375	375	375	485	485
C, mm	18	18	18	25	25
DTR, mm	76	76	76	108	108
Dmax, mm	104	118	118	148	148
DA, mm	150	150	150	180	180
E, mm	338	338	428	450	450
F, mm	210	210	300	270	270
G, mm	260	260	350	345	345
H, mm	290	290	380	380	380
I, mm	11	11	11	13	13
K, mm	250	250	250	340	340
L, mm	125	125	125	170	170
M, mm	6	6	6	10	10
N, mm	33	33	33	47.5	47.5
O, mm	194	194	284	250	250
P, mm	19	19	19	24	24
Q, mm	13	13	13	19	19
R, mm	125	125	125	170	170
S, mm	4	6	6	8	8
$\alpha_1, ^\circ$	130	130	130	145	145
$\alpha_2, ^\circ$	110	110	110	125	125
$\alpha_3, ^\circ$	40	40	40	50	50
$\beta_1, ^\circ$	150	150	150	155	155
$\beta_2, ^\circ$	90	90	90	100	100
$\beta_3, ^\circ$	80	80	80	83	83

*Dimensions for models with optional features are available on request!

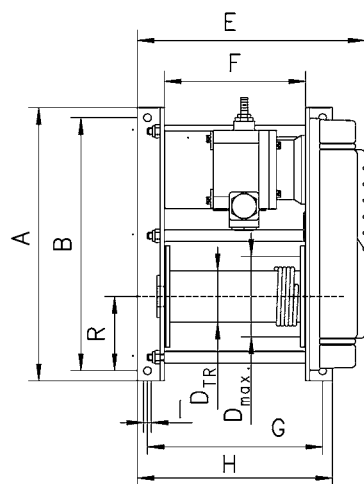

Rope lead-offs for electric winch model RPE

! Yale winches are not designed for passenger elevation applications and must not be used for this purpose.