


Dimensions model YGK-E

Model	YGK-E 1.6-6/12	YGK-E 3.2-5/6	YGK-E 3.2-5/12	YGK-E 5-5/7	YGK-E 5-5/12	YGK-E 10-5/7	YGK-E 10-5/12	YGK-E 15-4/7	YGK-E 15-4/12
A min., mm	400	406	406	508	508	616	616	753	753
A max., mm	502	508	508	535	535	673	673	788	788
B, mm	270	270	270	476	476	540	540	514	514
C min., mm	219	219	219	206	206	206	206	359	359
C max., mm	356	356	356	356	356	356	356	508	508
D, mm	95	95	95	102	102	152	152	178	178
E min., mm	160	160	160	140	140	114	114	256	256
E max., mm	296	296	296	289	289	264	264	405	405
F min., mm	464	464	464	611	611	742	742	789	789
F max., mm	464	464	464	760	760	891	891	938	938
G, mm	368	375	375	454	454	575	575	611	611
H, mm	156	156	156	127	127	175	175	229	229
I, mm	165	165	165	270	270	359	359	356	356
K, mm	324	324	324	527	527	645	645	641	641
L, mm	365	375	635	524	778	532	791	597	870
M, mm	178	89	178	140	225	143	229	155	251
N, mm	327	406	406	359	359	460	460	548	548
O, mm	470	470	819	727	1060	765	1108	873	1241
P, mm	149	149	149	120	120	159	159	178	178
Q, mm	251	251	251	–	–	–	–	171	171
R, mm	76	156	156	238	238	302	302	368	368
S, mm	35	35	35	35	35	51	51	45	45
T, mm	23	34	34	43	43	55	55	69	69
U, mm	25	36	36	43	43	56	56	77	77
V, mm	27	37	37	46	46	66	66	76	76



Other beam flange widths on request!

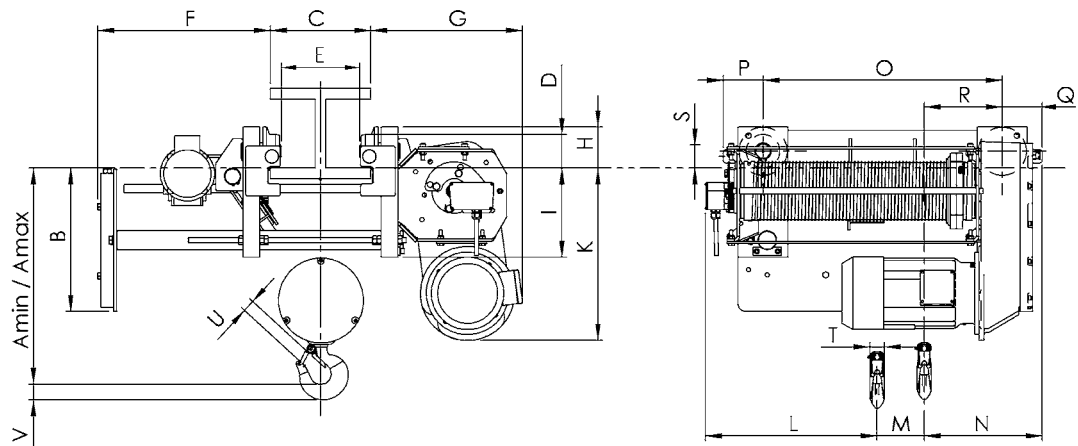

The adjacent picture shows the bottom block for a 2/1 reeving