




Dimensions model CPV/CPVF

Model	CPV/CPVF 2-8	CPV/CPVF 5-4	CPV/CPVF 5-8 CPV/CPVF 2-20	CPV/CPVF 10-4	CPV/CPVF 10-8 CPV/CPVF 5-20	CPV/CPVF 20-4
A, mm	357	393	357	430	431	528
A1, mm	196	196	196	196	234	234
A2 (Size I), mm	476	476	476	476	564	564
A2 (Size II), mm	526	526	526	526	644	644
A2 (Size III), mm	606	606	606	606	734	734
A2 (Size IV), mm	798	798	798	798	934	934
B, mm	22	22	22	29	29	37
B1, mm	15	15	15	15	20	20
C, mm	29	29	29	35	35	40
C1, mm	38	38	38	38	45	45
C2, mm	105	105	105	105	154	154
D, mm	15	15	15	21	21	26
D1, mm	15	15	15	15	15	15
E, mm	277	277	277	277	326	326
G, mm	120	144	120	144	140	173
G1 (Size I), mm	142	166	142	166	175	208
G1 (Size II), mm	162	186	162	186	175	208
G1 (Size III), mm	162	186	162	186	175	208
G1 (Size IV), mm	162	186	162	186	175	208
H, mm	157	133	157	133	186	154
H2, mm	158	158	158	158	186	186
K (CPV), mm	208	208	208	208	285	285
K (CPVF), mm	208	208	208	208	285	285
M (Size I), mm	162	162	162	162	209	209
M (Size II), mm	197	197	197	197	209	209
M (Size III), mm	197	197	197	197	209	209
M (Size IV), mm	197	197	197	197	209	209
N*, mm	219	219	219	219	274	274



*for 230V, 1-phase, 50Hz: +35 mm

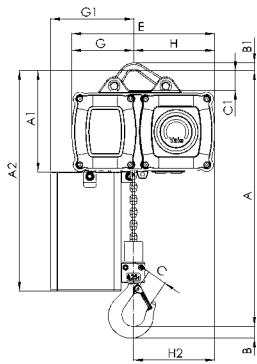

Model CPV/CPVF
with suspension lug, 250 - 1000 kg, single fall

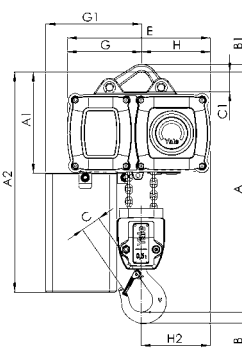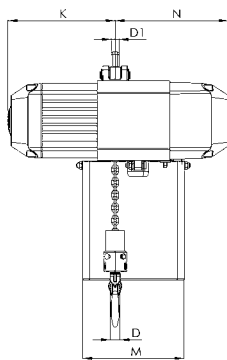

Model CPV/CPVF
with suspension lug, 500 - 2000 kg, double fall

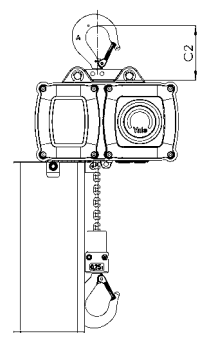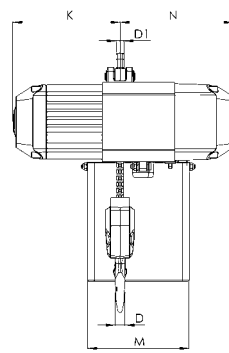

Model CPV/CPVF
with suspension hook,
250 - 2000 kg